# Micro Type C (9.4 mm)
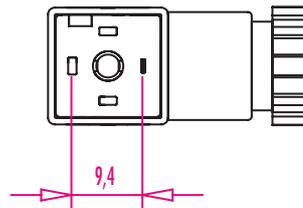
Product Code: 6-14, One-piece Housing
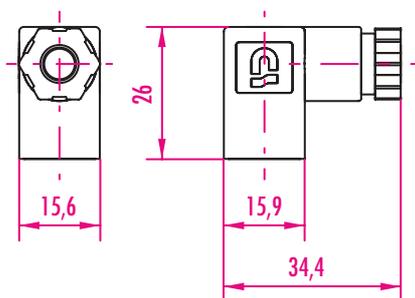


9,4

## Technical Data

| Standard Product Features: | Special Versions as Options: |
|---|---|
| Clamping contact without wire protecting plate | – |
| Housing with M 12 connection | – |
| Colour of housing black | – |
| Colour of housing grey | – |
| Colour of housing transparent | Colour of housing natural (milky) |
| Cable gland without cable clamp | – |
| Ground position 12h | Ground position 3h, 6h, 9h |
| Central-fixing screw in St 4.8 zinc-plated | Central-fixing screw in stainless steel |
| PreCon logo in the housing | Customized logo on request |
| Packaging unit 300 pcs. | Single packaging |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Additional special versions are available on request.
Circuit versions see page 28 - 32

Product code: 6-14
One-piece housing

26

15,6

15,9

34,4

## Part Numbers of Standard Versions

| 6 | - | 1 | 4 | d | e | f | - | 0 | h | i | k |

Circuit version number
00: without circuit; 01-99: see page 33; above 99 on request

Circuit version
0= without circuit or components soldered directly to the contact
5= components on the circuit board

Gasket and central-fixing screw
0= without gasket and screw
1= without gasket with standard screw
2= NBR profile gasket, standard screw
3= NBR flat gasket, standard screw
4= silicone flat gasket, standard screw

Ground position and connection
1= 6h, for cable 5-6mm
2= 12h, for cable 5-6mm

Number of poles and colour of housing
1= 2+ground, black
2= 2+ground, grey
3= 2+ground, transparent without circuit or with circuit with components soldered directly to the contact
4= 2+ground, transparent with circuit board
5= 3+ground, balck
6= 3+ground, grey
7= 3+ground, transparent without circuit or with circuit with components soldered directly to the contact
8= 3+ground, transparent with circuit board