


Media: water – gas – fluid – steam- vacuum
 Pressure range: 0 to 16 Bar Max
 Media temperature: -10°C to +200°C max
 Ambient temperature: +5°C to +60°C
 Media viscosity: 600 centistokes max
 Mounting: any position
 Pilot Media: air – water – gas
 Pilot Pressure: 5 to 8 Bar



Piston Stainless

3/8 - 3

ANGLE SEAT PISTON VALVE

NORMALLY OPEN

0 – 16 Bar

Type ASPVSS-316-NO



PRESSURE

Ø Port BSP	Function	Ø Orifice (mm)	Flow Kv Ltr/Min	Pressure (Bar)			Actuator (mm)	Part Number
				Min	1↔2 Over Seat	1⇒2 Under seat		
3/8	N/Open	10	75	0	16	8	40	ASPV10SS-316-NO
1/2	N/Open	15	90	0	16	8	40	ASPV15SS-316-NO
3/4	N/Open	20	167	0	16	8	50	ASPV20SS-316-NO
1	N/Open	25	253	0	16	8	50	ASPV25SS-316-NO
1 1/4	N/Open	32	383	0	16	8	63	ASPV32SS-316-NO
1 1/2	N/Open	40	683	0	16	8	80	ASPV40SS-316-NO
2	N/Open	50	1183	0	16	8	80	ASPV50SS-316-NO
2 1/2	N/Open	65	1800	0	16	16	100	ASPV65SS-316-NO
3	N/Open	80	2667	0	16	16	125	ASPV80SS-316-NO

OPTIONS


Visual Position Indicator, Anti water Hammer flow 1 ⇒2 Flow under seat. (Double acting type) Included
 Normally Closed Version
 Open and Closed mechanical position switches with LED 12-48vDC (PS)
 Modulating, double acting, 3 Way, flanged, 90-degree, manifold, PA6 plastic actuator, high pressure + other custom options.

CONSTRUCTION

Body, Tube, Piston and internal parts: AISI316 (CF8M) stainless steel
 Actuator head: AISI304 stainless steel (Rotation 360°)
 Seals and gaskets: Valve – PTFE, Actuator - FKM

OVERALL DIMENSIONS

Parts List
2.01 Bolt
2.02 Orifice Plate Seal
2.03 Disc Seal
2.04 Disc
2.5 Steam
2.6 V Seal
2.7 Spring
3.1 Body
3.2 Seal Ring
3.3 Screw connector
3.4 Cylinder
3.5 Cover
4.1 Spring
4.2 Piston
4.3 O ring
4.4 Bonnet
4.5 O Ring
4.6 Bearing Ring

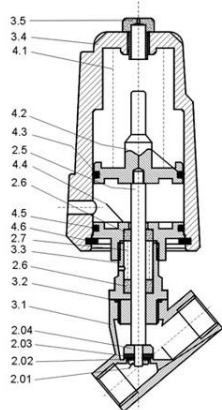

DN	Port	L	L1	SW	H	D	Act	Pilot	Kg
10	3/8	55	17	21	120	51	40	1/8	1.1
15	1/2	70	21	26.5	138	51	40	1/8	1.1
20	3/4	76	23	32	154	62	50	1/8	1.3
25	1	90	25	40	168	62	50	1/8	1.7
32	1 1/4	116	32	50	200	76	63	1/8	3.1
40	1 1/2	116	32	55.5	215	92	80	1/8	3.9
50	2	138	40	68.5	230	92	80	1/8	4.8
65	2 1/2	168	51	85	268	117	100	1/4	9.3
80	3	192	54	100	325	140	125	1/4	14.0



M1 Modulating Controller

