

COIL

Series

Connector

For BM520, PU520, PS520, PU320, PU322, CY520, SPU520, PU220AR-01/02 series

Order code




CN2211S9BSG



AC: CN2211S9ASG
DC: CN2211S9DSG



CN2211S9BGG
1/2" NPTF conduit connector




Clamping contact

Specifications

Housing	Black and gray: PA + 30% GF
Contact holder, Gland out	PA + 30% FV/ /PA 30% GF
Cable diameter, Gland size	6-8mm (PG9 or 1/2" NPTF)
Contact material	Cu Zn (AG)
Max. voltage	250VAC/300VDC
Max. current	16A
Operating current	10A
Spacing	11mm
Max. wire cross-section	1.5mm ²
Insulation class	C-VDE0110
Working temperature	-40 °C~+120°C

Dimensions

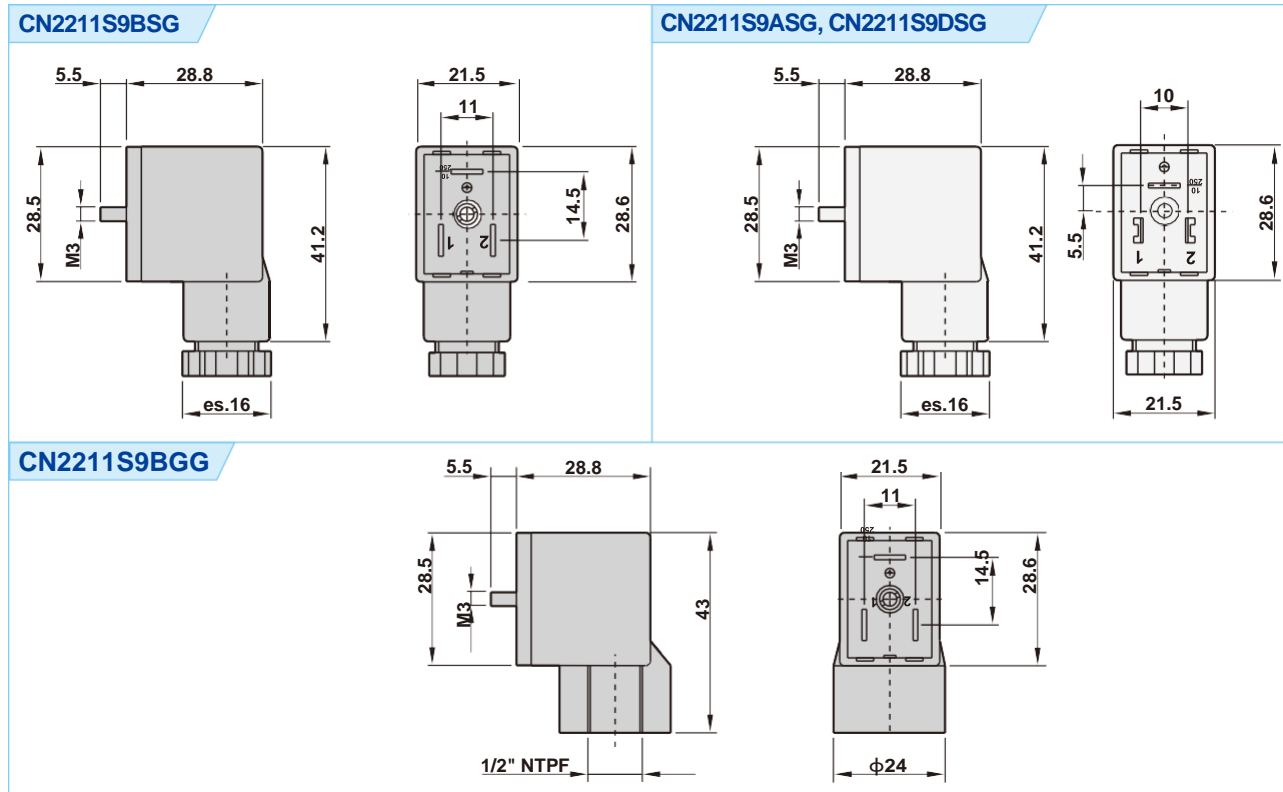

COIL

Series

Connector

For PU220A, PU220AR-03, PU225, AM325, SPU225, PE220, SPU220 series

Accessories

Coil

Order code




CN3018S9BSG



AC: CN3018S9ASM
DC: CN3018S9DSM



CN3018SNBMM
1/2" NPTF conduit connector



Clamping contact

Specifications

Housing	Black and gray: PA+30% GF
Contact holder, Gland out	PA + 30% FV/ /PA 30% GF
Gland size	M20x1.5 or 1/2"NPTF
Contact material	Cu Zn (AG)
Max. voltage	250VAC/300VDC
Max. current	16A
Operating current	10A
Spacing	18mm
Max. wire cross-section	1.5mm ²
Insulation class	C-VDE0110
Working temperature	-40 °C~+120°C

Dimensions

